



# SPECIFICATIONS

## SS-1000 MEASURING MODE

ANTERIOR SEGMENT (customized)	
Scan direction	Radial / Raster V / Raster H
Scan types	16 - 256 images
Scan resolution	256 - 512 A-scans per line sampling
Scan speed	Min 0.2 sec. / max 4.8 sec.
Scan range	Adjustable 6 - 16 mm
Scan depth	6 mm
Scan mode	2D, 3D
Fixation targets	1 x central / 4 x peripheral 1 x accommodation (+5 dpt to -10 dpt)
CORNEAL MAP	
Scan direction	Radial scan - 16 images
Scan resolution	512 A-scans per line sampling
Scan speed	0.3 sec.
Scan range	Ø 10 mm
BLEB SEGMENT	
Scan direction	Raster scan - horizontal, vertical
Scan resolution	256 lines x 256 images
Scan speed	2.4 sec.
Scan range	8 x 8 mm, 12 x 12 mm
ANTERIOR SEGMENT (High-Resolution Scan)	
3D / MOVIE	2D
Scan direction	128 images
Scan resolution	512 A-scans
Scan speed	2.4 sec.
Scan range	Ø 16 mm / 16 x 16 mm
ANTERIOR CHAMBER ANGLE (HD)	
3D / MOVIE	2D
Scan direction	64 images
Scan resolution	512 A-scans
Scan speed	1.2 sec.
Scan range	8 x 4 mm
	8 x 8 mm

## SS-1000 ANALYSIS

3D/2D ANALYSIS	
3D viewer	Gonioscopic , cutplanes, rotating, ITC
Maps	Topography (anterior/posterior/ACD) Pachymetry (numerical / individual) Ks / Kf / AvgK
Measurement	Personal curvature correction, anterior chamber angle, area / bleb segment analysis, ACD / CCT / flap / thickness / bias, (cornea / iris / ACD) volume, anterior / posterior keratoconus, screening, positioning of toric IOL, ITC (3D angle analysis), OKULIX (ray tracing IOL calculation)
Video export	2D rotation view / C-Scan view, 3D video


TOMEY EUROPE  
TOMEY GmbH  
Am Weichselgarten 19a  
91058 Erlangen, Germany  
Phone +49 9131 777 10, Fax +49 9131 777 1 20  
Email info@tomey.de

TOMEY ASIA-PACIFIC  
TOMEY CORPORATION JAPAN  
2-11-33 Noritakeshinmachi  
Nishi-ku, Nagoya 451-0051, Japan  
Phone +81 52 581 5327, Fax +81 52 561 4735  
Email intl@tomey.co.jp

**TOMEY**  
TECHNOLOGY AND VISION  
[www.tomey.de](http://www.tomey.de)

## SS-1000 SPECIFICATIONS

MEASURING UNIT	
Resolution	Axial (depth) 10 µm or less (in tissue) Transverse 30 µm or less (in tissue)
Scan speed	30,000 A-scans / second
Scan range	16 x 16 x 6 mm
Stroke of moving section	88 (X axis), 40 (Y axis), 45 (Z axis) mm
Stroke of chin rest	70 mm
Touch screen	8.4" colour TFT
Dimension WDH	360 x 493 x 519 mm
Weight	Approx. 21 kg
ALIGNMENT	
Mode	Manual via joystick or touch screen, auto alignment, auto shot
LIGHT-SOURCE UNIT	
Type	Swept source laser
Wavelength	1310 nm
Principal	Fourier domain
Output power	Less than 5 mW
Dimension WDH	475 x 260 x 195 mm
Weight	Approx. 15 kg
POWER SOURCE	
Voltage	100 VAC - 240 VAC
Frequency	50/60 Hz
Power consumption	120 VA - 160 VA
Workstation Computer	
OS	Windows® XP or Windows® 7
CPU	Intel® Core™ 2 duo processor or higher
Memory	4 GB or higher
HDD RAID	750 GB or higher x 2 (level1)
Data output	Printer (LAN / USB)
Display	19" colour TFT display
Data export	LAN / USB
Documentation	MS / printer (not included) Video printer (not included)
Accessories	
E-lift table	1200 x 550 mm, PC holder, Printer holder, Isolation transformer

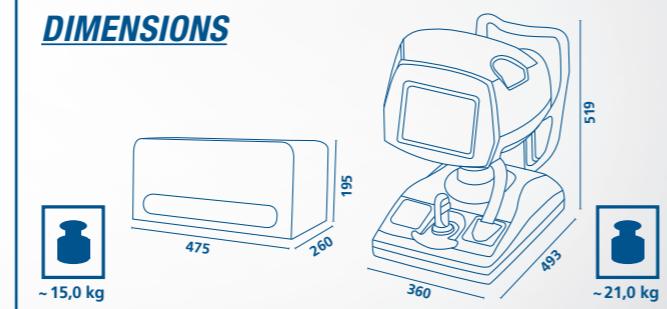

2012/08 - subject to change without notice

# FOURIER DOMAIN OCT CASIA SS-1000

## 3D SWEPT SOURCE OCT



# DELIGHT IN SIGHT

High speed autotracking measurement for anterior segment.

- High scanning speed:  
30,000 A-Scans/sec.
- 130,800 A-Scans
- Cut plane 16 x 16 x 6 mm
- Topo / Pachy map in 0.3 sec.

- Free adjustable display in 2D and 3D
- Individual correction based on the cornea power
- Total scanning time only 2.4 sec. for high resolution

**TOMEY**  
TECHNOLOGY AND VISION



# THE TOMEY CASIA SS-1000 FOURIER DOMAIN OCT




## QUALITY IN DETAIL

With the **CASIA SS-1000** Fourier Domain OCT you can take high-speed and high-resolution images for a variety of clinical situations. Due to the swept source technology, three dimensional data can be captured at a speed of 0.3 to 2.4 seconds with minimal motion artefact.

The **SS-1000** measures 256 B-scans over the cornea which enables the real 3D view. The high density of the B-scans allows you an entire analysis of the anterior chamber.

Since the **SS-1000** is a non-contact system, you can take the images immediately after surgery. Corneal curvature, anterior chamber angle analysis, bleb segment analysis, measurement of corneal thickness and anterior chamber depth and the anterior segment of an opaque cornea can be analyzed with various applications. Additional to the measurement values in the single B-scans the SS-1000 provides you with a Topography and Pachymetry map of the surface of the cornea. The individual cornea power correction, considering all physical changes in the AC is guarantor of correct calculation and relocation of the same cornea spot.

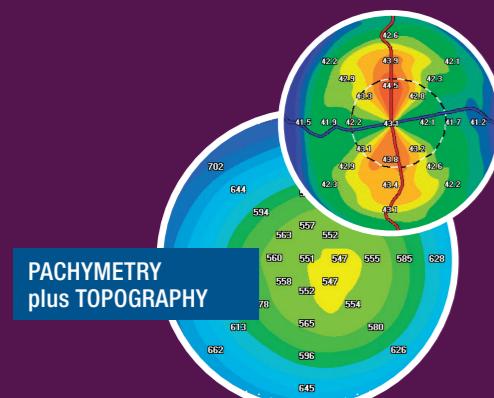

# A Picture is worth a thousand words

To see 3D videos and get more information please visit our homepage:  
[www.tomey.de](http://www.tomey.de)

